

GENERAL ACCESSORIES &
SYSTEM COMPONENTS




Adjustable Spring Clips



Hanging Wires



Preformed wire dip 38 mm
Galvanized mild steel wire

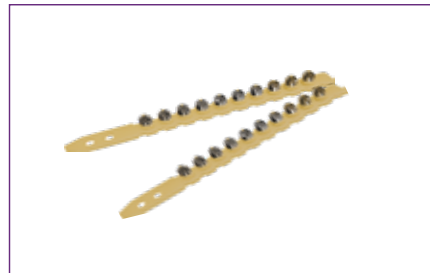

Yellow Catridge



Ceiling Clip With Nail



Gypsum Screws &
Steel Nails



Hammer Fixing



Ceiling Wedge Anchor



Ceiling Wire Hanger



Fissure Plug



Mesh Tape



Metal Conrner Tape


ACCESS PANELS

Designed and manufactured by Al-waseef industries, PANELO ceiling access panel redefine concealed access by combining architectural elegance, precision engineering, and long-term reliability. Manufactured by Al Waseef Industries, they are designed to meet the highest standards of quality, functionality, and seamless architectural integration for commercial, residential, healthcare, hospitality, and institutional projects.


Crafted from premium powder-coated extruded aluminum and high-quality gypsum board, each panel features a concealed push-to-open mechanism and precision-engineered hinges for smooth, reliable operation. Available in Regular, Moisture Resistant (MR), and Fire Resistant (FR) options.

Finished in standard RAL 9016, with custom colours available on request, every panel delivers a clean, flush appearance enhanced by a precise 1–2 mm shadow gap, creating a refined finish that complements modern architectural interiors.


STANDARD SIZES		ACTUAL DOOR OPENING SIZE	
300mm x 300mm		295 x 295mm	
400mm x 400mm		395 x 395mm	
450mm x 450mm		445 x 445mm	
500mm x 500mm		495 x 495mm	
600mm x 600mm		595 x 595mm	
600mm x 1200mm		595 x 1195mm	
CUSTOMIZED ACCESS PANELS			




TXP WITH HINGES




SMART WITH HINGES




LAY-IN



CAP-UK SPECIAL



CAP-UK



TXP

Note: Custom sizes / Double door / Triple door Access Panels available upon request.

PANELO[®]
BY AWI

- GYPSUM CEILING PROFILES
- DRYWALL PARTITION SYSTEM
- EXPOSED T-GRID SUSPENSION SYSTEM
- CLIP-IN SUSPENSION SYSTEM
- GYPSUM CEILING TILES
- ACCESS PANEL
- GENERAL ACCESSORIES

“Innovating the Future
of Construction”



ABOUT US

Al Waseef Industries, a division of the Al Waseef Group, has been serving the UAE construction industry since 2007. Backed by over 25 years of industry expertise, the company has earned a reputation as a trusted manufacturer of premium drywall and ceiling system solutions, delivering exceptional quality, reliability, and innovation across the UAE and GCC.

The company's product portfolio includes drywall, ceiling, and partition metal profiles, T-grid ceiling suspension systems, gypsum ceiling tiles, access panels, and a wide range of accessories. To further strengthen market presence, Al Waseef Industries introduced a dedicated brand as “PANELO” offering a complete range of drywall and ceiling systems, accessories, and related building products designed to meet the demands of commercial, residential, and industrial projects.

The company further reinforced its industrial presence by acquiring Metex Metal Expansion Factory in 2018. In 2022, it established a state-of-the-art manufacturing facility in Dubai Industrial City, incorporating advanced production technology and modern manufacturing processes to ensure consistent product quality, operational efficiency, and dependable supply.

CONCEALED CLIP IN CEILING SYSTEM

SPRING TEE

Ref	Dimension		Standard Thickness Upto	Standard Length	Material	Bundle
	A	B				
35ST	35	29	0.40 – 0.50 mm	4000 mm	G.I.	10

MAIN CHANNEL

Ref	Dimension			Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C				
38MC	12	38	12	0.40 to 0.50 mm	3000 mm	G.I.	20

EDGE TRIM

Ref	Dimension		Standard Thickness Upto	Standard Length	Material	Bundle
	A	B				
ET38X15	38	15	0.50 mm	3000 mm	P.P.AL	20

ALUMINUM CEILING TILES

CONCEALED / CLIP IN TYPE

AL 60 C

Ceiling Type	Clip - In
Thickness:	0.6 / 0.7 mm
Size:	600 x 600 mm
Material:	Aluminum

AL 120 C

Ceiling Type	Clip - In
Thickness:	0.6 / 0.7 mm
Size:	600 x 1200 mm
Material:	Aluminum

CONCEALED / LAY IN TYPE

Ref	Ceiling Type	Thickness in mm	Size in mm	Material
AL 60 L	Lay - In	0.6 / 0.7 mm	600 x 600	Aluminum
AL 120 L	Lay - In	0.6 / 0.7 mm	600 x 1200	Aluminum

GYPSUM CEILING PROFILES

FURRING CHANNEL

Ref	Dimension				Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C	D				
35FC	35	22	68		0.40 to 0.90 mm	3000 mm	G.I.	25

MAIN CHANNEL

Ref	Dimension			Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C				
38MC	12	38	12	0.40 to 1.40 mm	3000 mm	G.I.	20

L-ANGLE

Ref	Dimension		Standard Thickness Upto	Standard Length	Material	Bundle
	A	B				
25LA	25	25	0.40 to 0.90 mm	3000 mm	G.I.	25

DRYWALL PARTITION SYSTEM

STUD

Ref	Dimension			Standard Thickness Upto	Standard Length	Material	Bundle
	F1	W	F2				
48SD	34	48	32	0.40 to 0.90	3000	G.I.	12
50SD	34	50	32	0.40 to 0.90	3000	G.I.	12
60SD	34	60	32	0.40 to 0.90	3000	G.I.	12
63SD	34	63	32	0.40 to 0.90	3000	G.I.	12
70SD	34	70	32	0.40 to 0.90	3000	G.I.	12
73SD	34	73	32	0.40 to 0.90	3000	G.I.	12
90SD	34	90	32	0.40 to 0.90	3000	G.I.	12
92SD	34	92	32	0.40 to 0.90	3000	G.I.	12
98SD	34	98	32	0.40 to 0.90	3000	G.I.	12
123SD	34	123	32	0.40 to 0.90	3000	G.I.	12
148SD	34	148	32	0.40 to 0.90	3000	G.I.	12

Special sizes available on request

DRYWALL PARTITION SYSTEM COMPONENTS

BOARD PROTECTION CHANNEL (PERFORATED)

Ref	Dimension			Standard Thickness Upto	Standard Length	Material	Bundle
	F1	W	F2				
13BC	26	14	10	0.35 to 0.45 mm	3000 mm	G.I.	20

PPGI GYPSUM SHADOW ANGLE

Ref	Dimension				Standard Thickness Upto	Standard Length	Coating
	A	B	C	D			
10PSG	10	20	13	20	0.45 mm	3000 mm	Polyster Pre-Painted Coating
15PSG	15	20	13	20	0.45 mm	3000 mm	Polyster Pre-Painted Coating
20PSG	20	20	13	20	0.45 mm	3000 mm	Polyster Pre-Painted Coating

CORNER BEAD

Ref	Dimension		Standard Thickness Upto	Standard Length	Material	Coating
	A	B				
CBD	30	30	0.45 mm	3 MTR	G.I.	ZINC COATING 120 (ASTM A653/A653M Hot dip galvanized)

SHADOW GAP ALUMINIUM F PROFILE

Ref	Dimension				Standard Thickness Upto	Standard Length	Material	Bundle
	A	B	C	D				
10FSG	10	20	13	20	1.2 mm	3000 mm	PPAL.	20
15FSG	15	20	13	20	1.2 mm	3000 mm	PPAL.	20
20FSG	20	20	13	20	1.2 mm	3000 mm	PPAL.	20

TRACK

Ref	Dimension			Standard Thickness Upto	Standard Length	Material	Bundle
	F1	W	F2				
50TK	25	50	25	0.40 to 0.90	3000	G.I.	12
52TK	25	52	25	0.40 to 0.90	3000	G.I.	12
62TK	25	62	25	0.40 to 0.90	3000	G.I.	12
65TK	25	65	25	0.40 to 0.90	3000	G.I.	12
72TK	25	72	25	0.40 to 0.90	3000	G.I.	12
75TK	25	75	25	0.40 to 0.90	3000	G.I.	12
92TK	25	92	25	0.40 to 0.90	3000	G.I.	12
94TK	25	94	25	0.40 to 0.90	3000	G.I.	12
100TK	25	100	25	0.40 to 0.90	3000	G.I.	12
125TK	25	125	25	0.40 to 0.90	3000	G.I.	8
150TK	25	150	25	0.40 to 0.90	3000	G.I.	8

BOARD PROTECTION CHANNEL (PLAIN)

Ref	Dimension			Standard Thickness Upto	Standard Length	Material	Bundle
	F1	W	F2				
13BC	26	14	10	0.35 to 0.45 mm	3000 mm	G.I.	20

T-24 (METRIC/IMPERIAL) SYSTEM COMPONENTS

MAIN TEE

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
M24MT	38 mm	24 mm	0.35 mm	3600 mm	P.P.G.I.	25
I24MT	1.49"	0.94"	0.01"	141.73"	P.P.G.I.	25

CROSS TEE 1.20

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
M24CT (1.20)	28 mm	24 mm	0.35 mm	1200 mm	P.P.G.I.	50
I24CT (4")	1.10"	0.94"	0.01"	47.24"	P.P.G.I.	50

CROSS TEE 0.60

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
M24CT (0.60)	28 mm	24 mm	0.35 mm	600 mm	P.P.G.I.	75
I24MT (2")	1.10"	0.94"	0.01"	23.62"	P.P.G.I.	75

PERIMETER ANGLE

W-SHADOW ANGLE-9 MM GROOVE (24 X 19)

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
WSA24X19 (H)	24 mm	19 mm	0.45 mm	3000 mm	P.P.G.I.	45
WSA24X19 (I)	0.94"	0.74"	0.01"	118.11"	P.P.G.I.	45

PPGI L ANGLE (24 X 19)

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
LA24X19 (H)	24mm	19mm	0.45 mm	3000 mm	P.P.G.I.	50
LA24X19M (I)	0.94"	0.74"	0.01"	118.11"	P.P.G.I.	50

Note:

Standard Colour: RAL 9003, Other RAL colours are available upon request.

Special sizes available on request

T-15 (METRIC/IMPERIAL) SYSTEM COMPONENTS

MAIN TEE

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
M15MT	38 mm	15 mm	0.35 mm	3600 mm	P.P.G.I.	25
I15MT	1.49"	0.6"	0.01"	141.73"	P.P.G.I.	25

CROSS TEE 1.20

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
M24CT (1.20)	28 mm	15 mm	0.35 mm	1200 mm	P.P.G.I.	80
I24CT (4")	1.10"	0.6"	0.01"	47.24"	P.P.G.I.	80

CROSS TEE 0.60

Ref	Height	Width	Standard Thickness Upto	Standard Length	Material	Bundle
M15CT (0.60)	28 mm	15 mm	0.35 mm	600 mm	P.P.G.I.	123
I15MT (2")	1.10"	0.6"	0.01"	23.62"	P.P.G.I.	123

GYPSUM CEILING TILES

			
Safari	Diamond	New Shade (Plain)	Islamic

Al Waseef provides a wide range of Gypsum Ceiling Tiles, main patterns from our range are displayed above.

Gypsum Tile Sizes: 600 x 600 mm, 600 x 1200 mm

Thickness: 7 mm, 9 mm and 12 mm

Edge: Square edge

W-SHADOW ANGLE (19 MM GROOVE) 20X19X19X20

Ref	H (mm)	W (mm)	Standard Thickness Upto	Standard Length	Material	Bundle
WSA20X19X19X20	20	19	0.45 mm	3000 mm	PPGI	30
WSA20X19X19X20	20	19	0.01"	118.11"	PPGI	30